
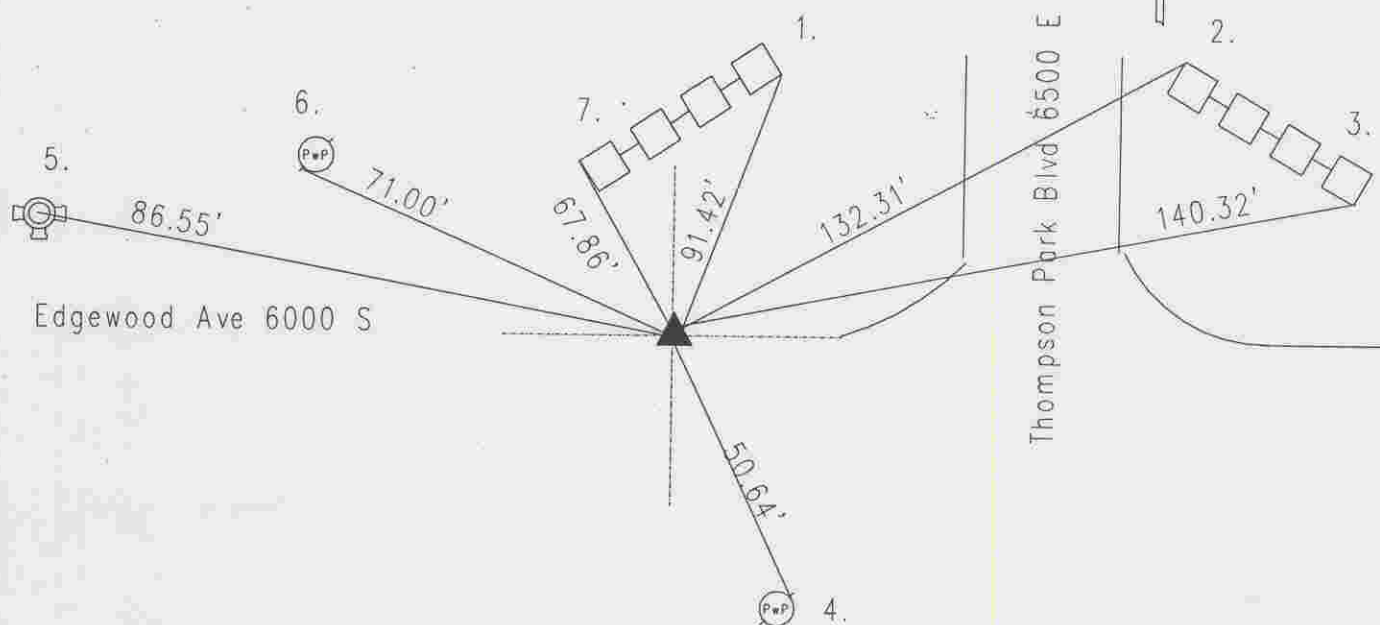


OFFICE OF THE MARION COUNTY SURVEYOR
 SECTION RECORD CORNER
 SECTION 11 TOWNSHIP 14 RANGE 4
 DATE: 8-25-01-09-29-06
 PARTY CHIEF: Whiteside- Kiste
 CREW: _____
 TYPE OF MARKER: Harrison down 1"
 METHOD OF ESTABLISHMENT: County: 4-12-96

IN. S.P.C. E ZONE NAD '83
 NAME: 14041102
 N: 492191.4693(m)
 E: 66773.1754(m)

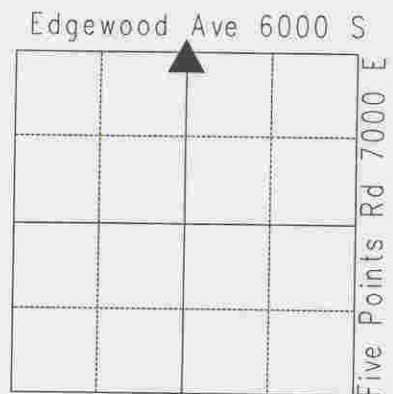

Original post set 1820 by Hendricks with witnesses: 48" white oak N 12 W 21 links; 20" beech S 47 E 24 links per Marion County Atlas pg. 9. Hosbrook called stone set with no witness. 6-20-52 Monroe called the same. 8-22-68 Bookedis called a PK nail. 7-12-75 Fortner called the same. 5-26-87 Greene called railroad spike with cut 'x'. 8-1-90 excavated and railroad spike with cut 'x' found at surface. No stone found. Harrison set. Re-tied 4-12-96 by Wilcoxon. Re-tied 8-25-01 by Whiteside.

14041102

REF.	DISTANCE	DESCRIPTION
1.	91.42'	Easterly corner of brick column
2.	132.31'	Northerly corner of brick column
3.	140.32'	Southerly corner of brick column
4.	50.64'	Mag nail w/washer E PwP#98-737 6"up
5.	86.55'	Top nut of fire hydrant
6.	71.00'	PK nail w/washer SW PwP#58-736 8"up
7.	67.86'	Westerly corner of brick column